

Cable Glands


North American Cable Glands/Connectors

710

Explosion Proof
IECEX and ATEX Approved Flameproof Exd,
Increased Safety Exe and Restricted Breathing ExnR
(Note: Dual Marked UL & ATEX as standard).

Application

- Outdoor or indoor use.
- For use with non-armoured cable, as permitted by the NEC.
- See technical section for installation rules and regulations.

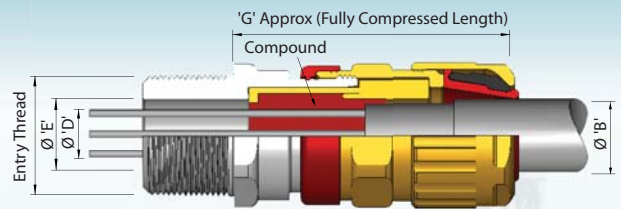

CABLE GLAND SELECTION TABLE										
Size Ref.	Entry Thread Size		Cable Acceptance Details					'G'	Hexagon Dimensions	
	NPT Standard or Option	Metric *	Inner Jacket / Cores			Outer Jacket 'B'			Across Flats	Across Corners
			Max. Over Cores 'D'	Max Inner Jacket 'E'	Max. No. of Cores	Min.	Max.			
Os	½"	M20 ¹	0.35"	0.39"	6	0.22"	0.47"	2.55"	0.94"	1.04"
O	½"	M20 ¹	0.35"	0.39"	6	0.37"	0.63"	2.55"	0.94"	1.04"
A	½" or ¾"	M20	0.43"	0.64"	10	0.49"	0.81"	2.59"	1.18"	1.28"
B	¾" or 1"	M25	0.64"	0.93"	21	0.66"	1.02"	2.80"	1.42"	1.56"
C	1" or 1¼"	M32	0.86"	1.23"	42	0.87"	1.30"	2.99"	1.81"	1.99"
C2	1¼" or 1½"	M40	1.04"	1.59"	60	1.10"	1.61"	3.18"	2.17"	2.36"
D	2" or 1½"	M50	1.46"	1.96"	80	1.42"	2.07"	3.60"	2.56"	2.79"
E	2½" or 2"	M63	1.88"	2.55"	100	1.81"	2.57"	3.59"	3.15"	3.46"
F	3" or 2½"	M75	2.32"	2.98"	120	2.24"	3.07"	3.99"	3.74"	4.09"
H ²	3½"	M90	2.79"	3.12"	120	3.07"	3.52"	3.54	4.18"	4.84"


All dimensions in inches (except * where dimensions are in millimetres). Os - F size metric entry threads are 1.5mm pitch as standard, 15mm length of thread. For H size glands, a 2mm pitch is supplied as standard, 20mm length of thread (1.5mm pitch with 15mm length of thread can be supplied) please specify when ordering

¹ Sizes Os and O are available with an M16 thread size. For O size with M16 thread, the maximum cable inner jacket diameter is 0.43".

² UL approved only

Technical Data

- UL Listing No: E84940.
- Suitable for use in:
 - Class 1, Division 2, Gas Groups A, B, C and D
 - Class 1, Zone 2, Gas Groups IIA, IIB and IIC
 - AExd IIC and AExe II Class 1, Zone 2.
- Flameproof Exd, Increased Safety Exe and Restricted Breathing ExnR .
- Certificate No's: Sira 06ATEX1295X and IECEx SIR 06.0082X.
- Suitable for use in Zone 1, Zone 2, Zone 21, Zone 22 and in Gas Groups IIA, IIB and IIC.
- Construction and Test Standards: UL 2225, IEC/EN 60079-0, IEC/EN 60079-1, IEC/EN 60079-7, IEC/EN 60079-15, IEC/EN 61241-0 and IEC/EN 61241-1.
- Ingress Protection: IP66, IP67 and IP 68 (30 metres for 7 days) to IEC/EN 60529 and NEMA 4X.
- Deluge Protection to DTS01.
- Operating Temperature Range: -50°C to +60°C (UL) and -60°C to +80°C (ATEX / IECEx).
- Assembly Instruction Sheet: AI 316 (UL) and AI 391 (ATEX / IECEx).
- Alternative certification options available:



Features

- Provides a barrier seal between the individual insulated conductors within the cable and prevents entry of the products of an explosion into the cable.
- Assembly of the cable gland compresses and distributes the compound evenly to effect a barrier seal at the point of entry into the enclosure.
- Provides an outer deluge seal to prevent moisture ingress to the cable armour and enclosure. Deluge seal is coloured red to indicate Hazardous Location product.
- Provides a cable retention and low smoke and fume, zero halogen seal onto the cables outer jacket.
- Manufactured in Brass (standard), Nickel Plated Brass, 316 Stainless Steel or Aluminium.
- Brass NPT entries are nickel plated as standard.

Ordering Information

Format for ordering is as follows:

Cable Gland / Connector Type	Size	Thread
710	C	1"NPT

Two part sealing compound and assembly instructions are supplied with the cable gland.