


Explosion Proof
IECEx and ATEX Approved Flameproof Exd,
Increased Safety Exe and Restricted Breathing ExnR
(Note: Dual Marked UL & ATEX as standard).

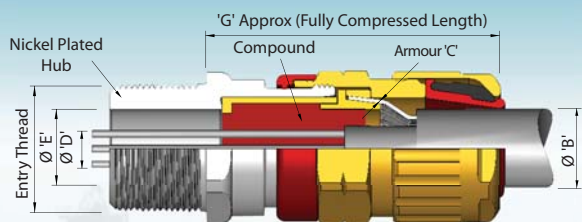

Application

- Outdoor or indoor use.
- For use with armoured jacketed cable, as permitted by the NEC.
- See technical section for installation rules and regulations.

CABLE GLAND SELECTION TABLE

Size Ref.	Entry Thread Size		Cable Acceptance Details								Hexagon Dimensions		
	NPT Standard or Option	Metric*	Inner Jacket / Cores			Outer Jacket 'B'		'C'			'G'	Across Flats	Across Corners
			Max. Over Cores 'D'	Max Inner Jacket 'E'	Max. No. of Cores	Min.	Max.	Steel Wire Armour ³	Braid	Tape			
Os	1/2"	M20 ²	0.35"	0.46"	6	0.22"	0.47"	0.036" / 0.049"	0.008" / 0.013"	0.008" / 0.031"	2.61"	0.94"	1.09"
O	1/2"	M20 ²	0.35"	0.46"	6	0.37"	0.63"	0.036" / 0.049"	0.008" / 0.013"	0.008" / 0.031"	2.61"	0.94"	1.09"
A	1/2" or 3/4"	M20	0.43"	0.49"	10	0.49"	0.81"	0.036" / 0.049"	0.008" / 0.013"	0.008" / 0.031"	2.65"	1.18"	1.36"
B	3/4" or 1"	M25	0.64"	0.72"	21	0.66"	1.02"	0.049" / 0.062"	0.008" / 0.013"	0.008" / 0.039"	2.75"	1.42"	1.64"
C	1" or 1 1/4"	M32	0.86"	0.97"	42	0.87"	1.30"	0.062" / 0.078"	0.008" / 0.013"	0.008" / 0.055"	2.93"	1.81"	2.09"
C2	1 1/4" or 1 1/2"	M40	1.04"	1.16"	60	1.10"	1.61"	0.062" / 0.078"	0.008" / 0.013"	0.008" / 0.070"	3.15"	2.17"	2.50"
D	2" or 1 1/2"	M50	1.46"	1.64"	80	1.42"	2.07"	0.078" / 0.098"	0.008" / 0.013"	0.008" / 0.070"	3.14"	2.56"	2.96"
E	2 1/2" or 2"	M63	1.88"	2.11"	100	1.81"	2.57"	0.098"	0.008" / 0.013"	0.008" / 0.070"	3.42"	3.15"	3.64"
F	3" or 2 1/2"	M75	2.32"	2.61" / 2.57" ¹	120	2.24"	3.07"	0.098"	0.008" / 0.013"	0.008" / 0.070"	3.61"	3.74"	4.31"

All dimensions in inches (except * where dimensions are in millimetres). Metric entry threads are 1.5mm pitch as standard, 15mm length of thread.

¹Smaller value is applicable when selecting standard NPT entry option.

²Sizes Os and O are available with an M16 thread size. For O size with M16 thread, the maximum cable inner jacket diameter is 0.43

³UL listing only applies to Steel Wire Armour.

Technical Data

- UL Listing No: E84940.
- Suitable for use in:
 - Class 1, Division 2, Gas Groups A, B, C and D
 - Class 1, Zone 2, Gas Groups IIA, IIB and IIC
 - AExd IIC and AExe II Class 1, Zone 2.
- Flameproof Exd, Increased Safety Exe II 2 GD and Restricted Breathing ExnR II 3G.
- Certificate No's: Sira 06ATEX1295X and IECEx SIR 06.0082X.
- Suitable for use in Zone 1, Zone 2, Zone 21, Zone 22 and in Gas Groups IIA, IIB and IIC.
- Construction and Test Standards: UL 2225, IEC/EN 60079-0, IEC/EN 60079-1, IEC/EN 60079-7, IEC/EN 60079-15, IEC/EN 61241-0 and IEC/EN 61241-1.
- Ingress Protection: IP66, IP67 and IP 68 (30 metres for 7 days) to IEC/EN 60529 and NEMA 4X.
- Deluge Protection to DTS01.
- Operating Temperature Range: -50°C to +60°C (UL) and -60°C to +80°C (ATEX / IECEx).
- Assembly Instruction Sheet: AI 319 (UL) and AI 382 (ATEX / IECEx).
- Alternative certification options available:

DNV Marine Approval ABS Marine Approval

GOST R-Exe IIU

Ordering Information

Format for ordering is as follows:

Cable Gland / Connector Type	Size	Thread
755	C	1" NPT

Two part sealing compound and assembly instructions are supplied with the cable gland.